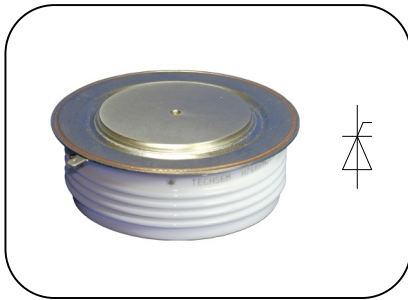


**Features:**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications:

- AC controllers
- DC and AC motor control
- Controlled rectifiers

Part No. H100KPJ-KT100dT

$I_{T(AV)}$	4500 A
V_{DRM}, V_{RRM}	3600V 4000V
	4200V 4500V

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_J (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180 half sine wave 50Hz Double side cooled	$T_C=70^\circ\text{C}$	125		3890	A
			$T_C=55^\circ\text{C}$	125		4500	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	3600		4500	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			400	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			60	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$				18000	$10^3\text{A}^2\text{s}$
V_{TO}	Threshold voltage		125			0.95	V
r_T	On-state slope resistance					0.16	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=3000\text{A}$, $F=90\text{kN}$	25			1.52	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$, Gate pulse $t_r \leq 0.5\mu\text{s}$ $I_{GM}=1.5\text{A}$	125			200	A/μs
Q_{rr}	Recovery charge	$I_{TM}=2000\text{A}$, $t_p=4000\mu\text{s}$, $di/dt=-5\text{A}/\mu\text{s}$, $V_R=100\text{V}$	125		8000		μC
I_{GT}	Gate trigger current	$V_A=12\text{V}$, $I_A=1\text{A}$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			25		200	mA
I_L	Latching current					1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180 sine double side cooled Clamping force 90kN				0.0057	C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.0015	
F_m	Mounting force			81		108	kN
T_{vj}	Junction temperature			-40		125	°C
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				2500		g
Outline	KT100dT						

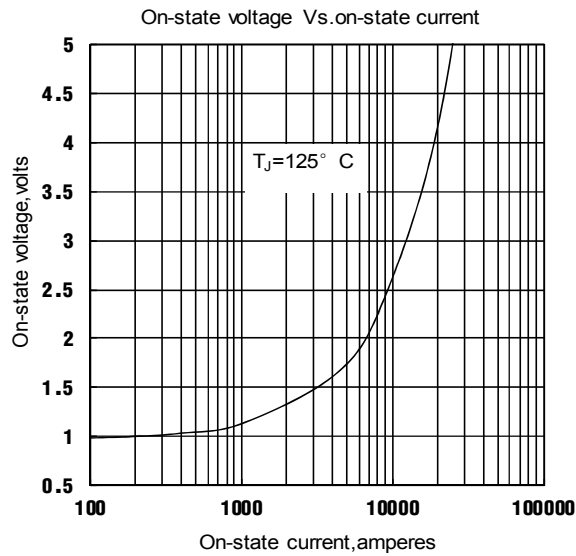


Fig.1

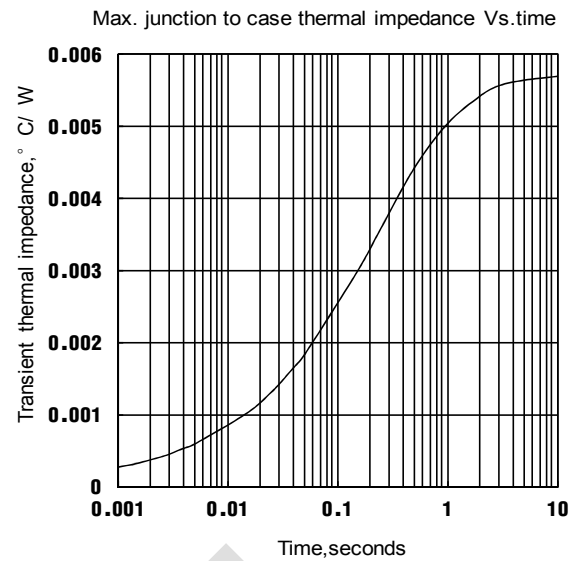


Fig.2

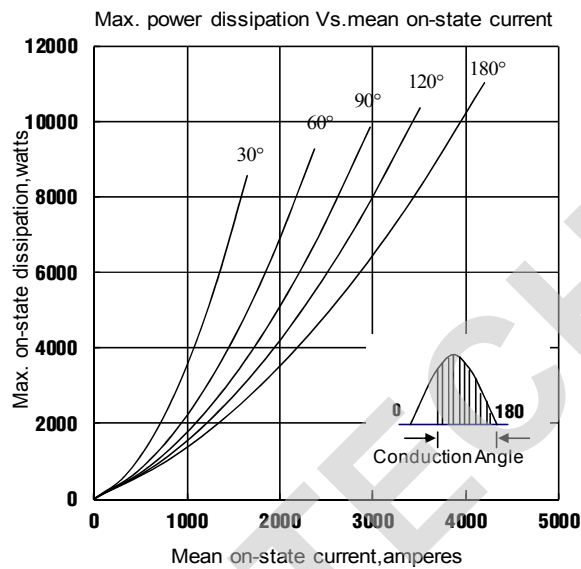


Fig.3

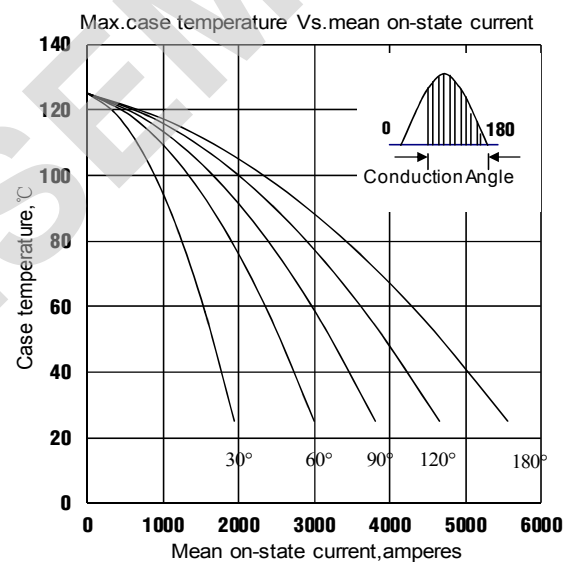


Fig.4

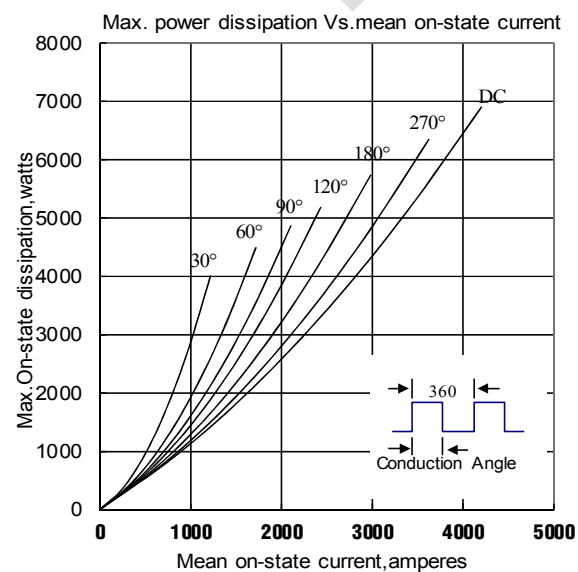


Fig.5

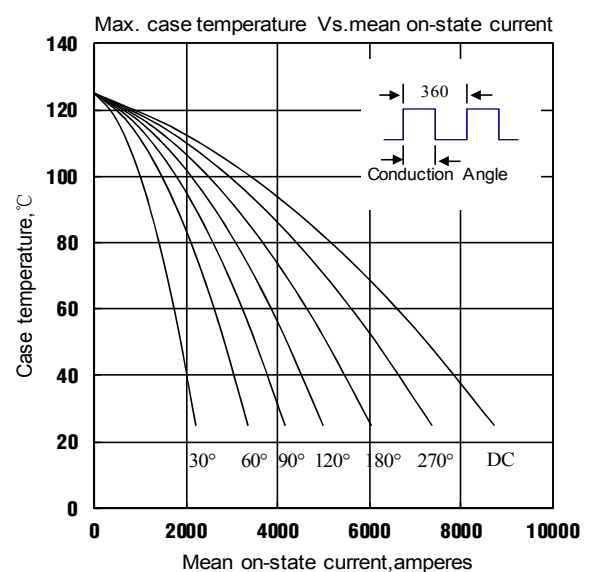


Fig.6

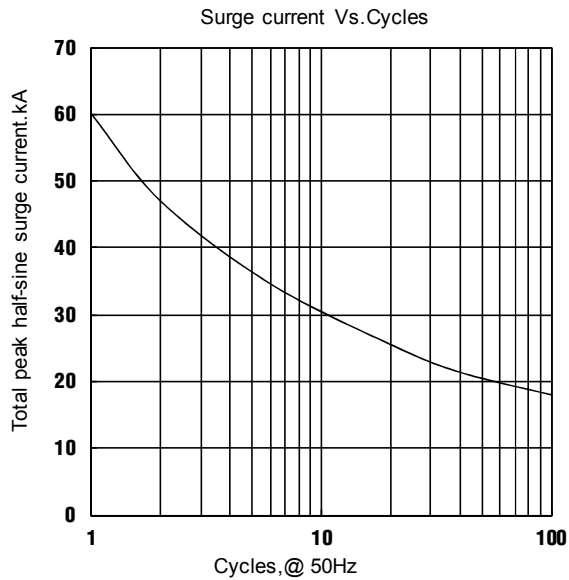


Fig.7

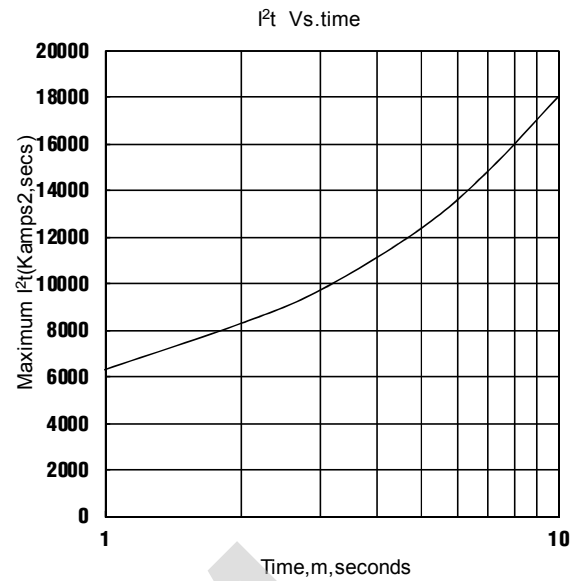


Fig.8


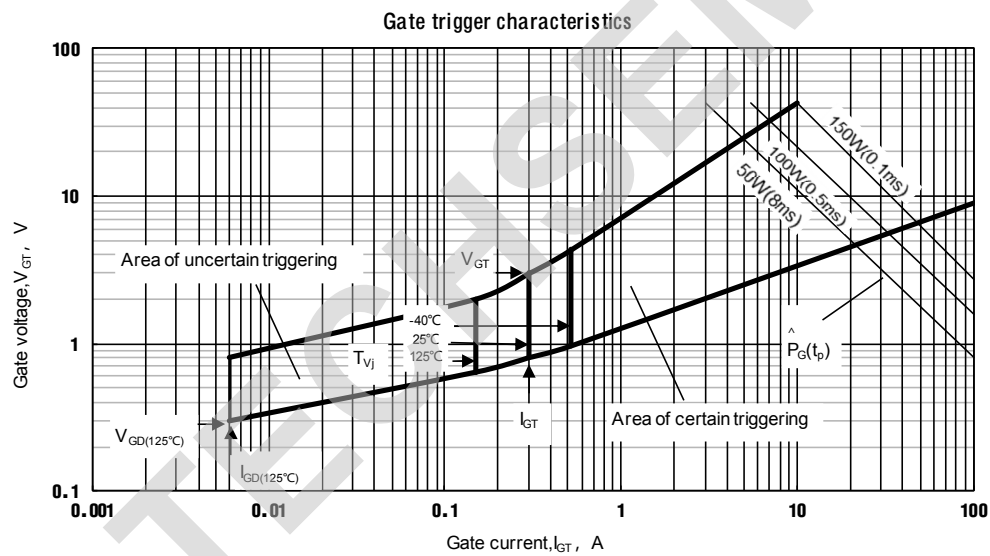


Fig.9

Outline:

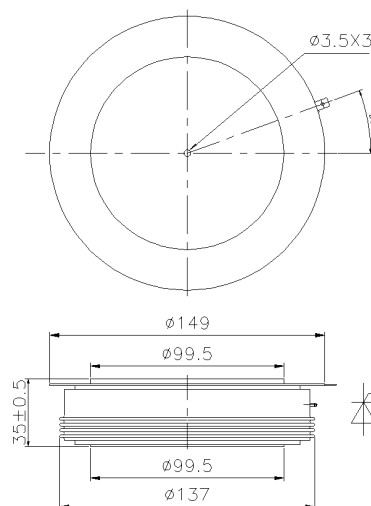

TECHSEM reserves the right to change specifications without notice.