

**Features**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

Part No. H76KPR-KT60dT

$I_{T(AV)}$	1370A
V_{DRM}, V_{RRM}	5600V 6000V
	6500V

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_J (C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180 half sine wave 50Hz Double side cooled, $T_C=70\text{ }^{\circ}\text{C}$	125			1370	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	5600		6500	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			600	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			22	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$				2420	$\text{A}^2\text{s}\cdot 10^3$
V_{TO}	Threshold voltage		125			1.20	V
r_T	On-state slope resistance					0.628	m Ω
V_{TM}	Peak on-state voltage	$I_{TM}=1500\text{A}$, $F=40\text{kN}$	125			2.12	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	V/ μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 3000A, Gate pulse $t_r \leq 0.5\mu\text{s}$ $I_{GM}=1.5\text{A}$	125			250	A/ μs
Q_{rr}	Recovery charge	$I_{TM}=2000\text{A}$, $t_p=4000\mu\text{s}$, $di/dt=-5\text{A}/\mu\text{s}$, $V_R=100\text{V}$	125		3500		μC
I_{GT}	Gate trigger current	$V_A=12\text{V}$, $I_A=1\text{A}$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			25		200	mA
I_L	Latching current					1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180 $^{\circ}$ sine double side cooled Clamping force 40.0kN				0.011	C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.003	C /W
F_m	Mounting force			35	40	47	kN
T_{vj}	Junction temperature			-40		125	C
T_{stg}	Stored temperature			-40		140	C
W_t	Weight				1140		g
Outline	KT60dT						

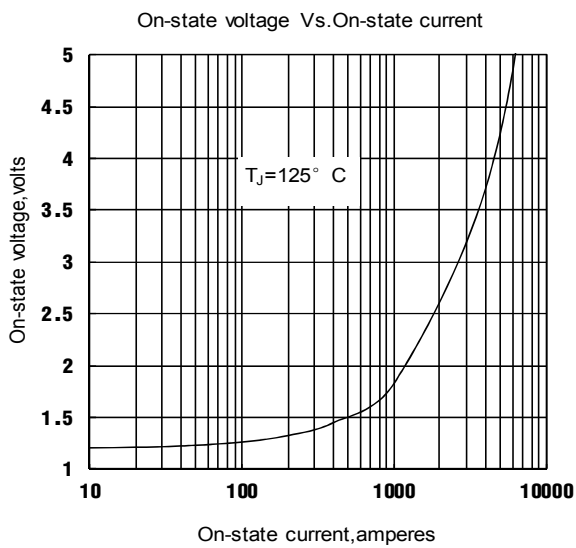


Fig. 1

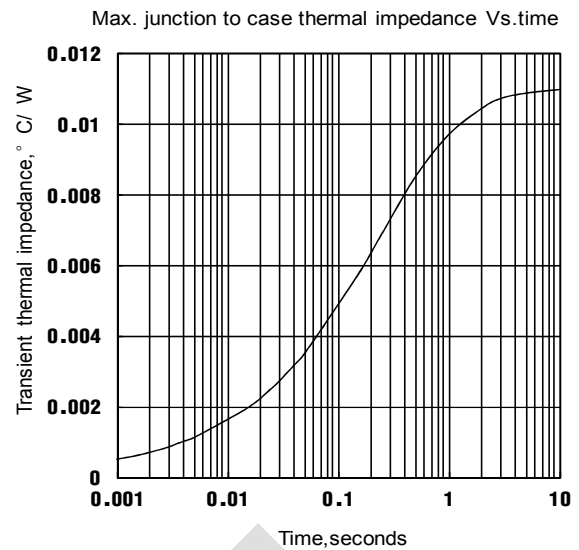


Fig. 2

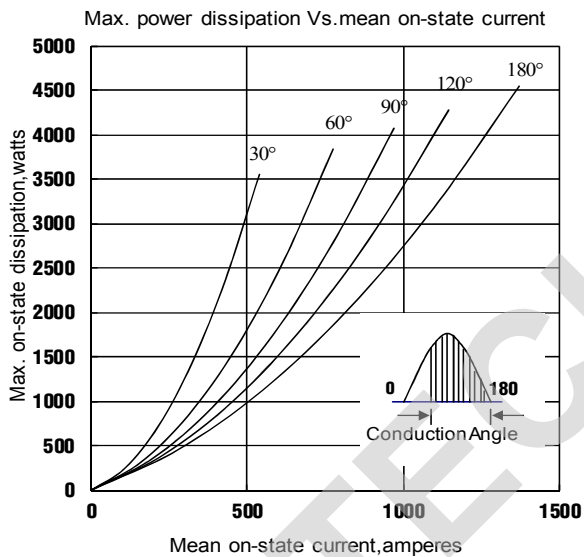


Fig. 3

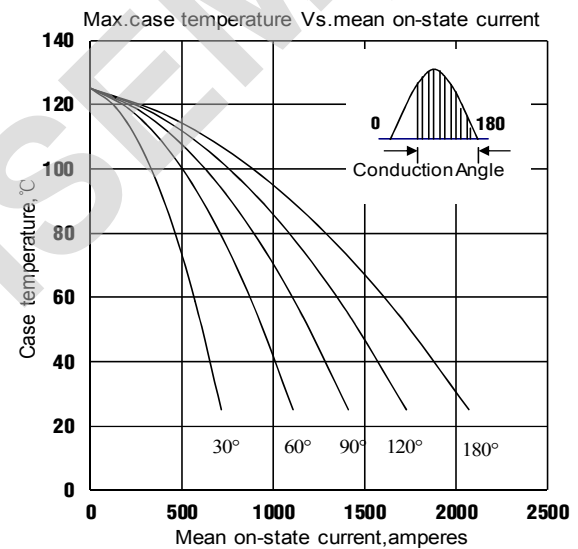


Fig. 4

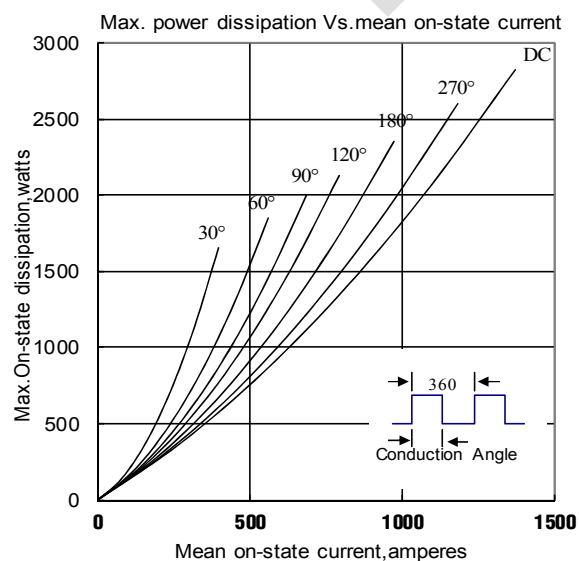


Fig. 5

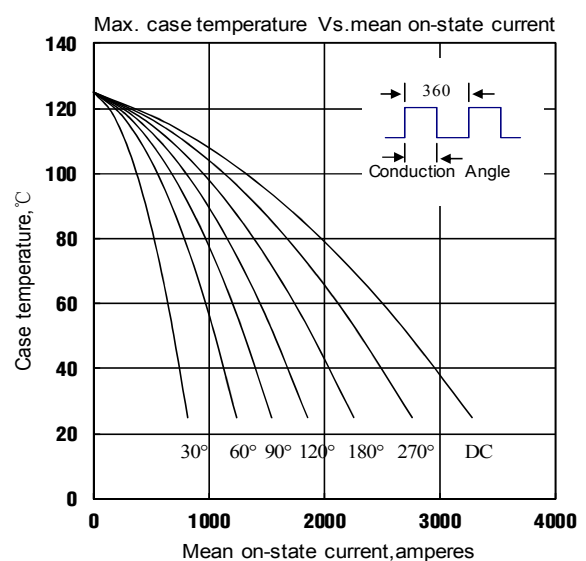


Fig. 6

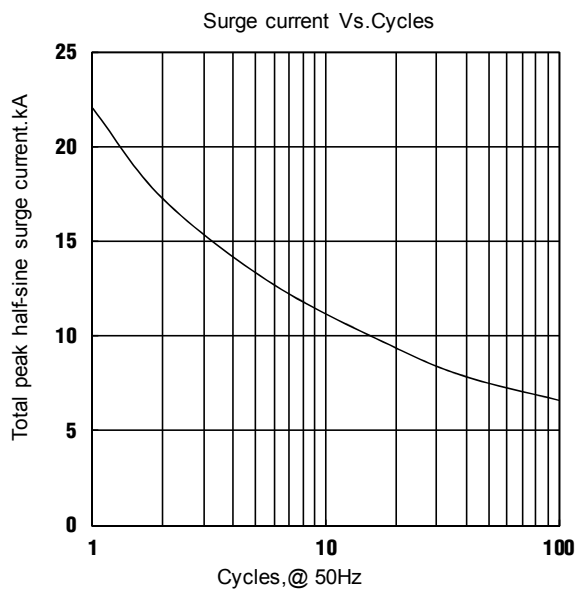


Fig.7

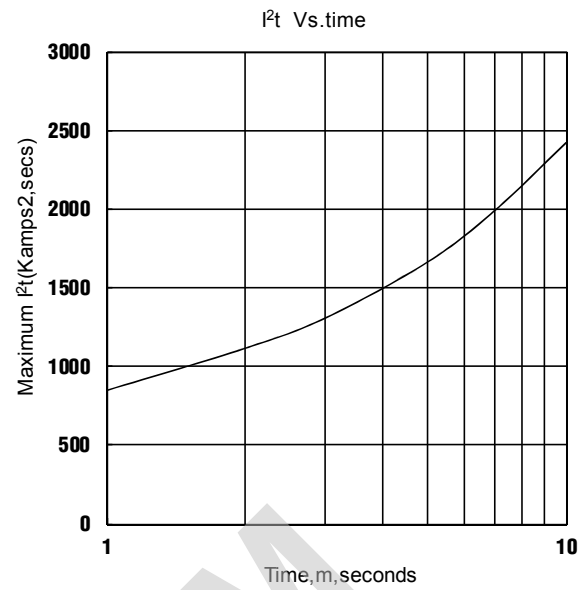


Fig.8


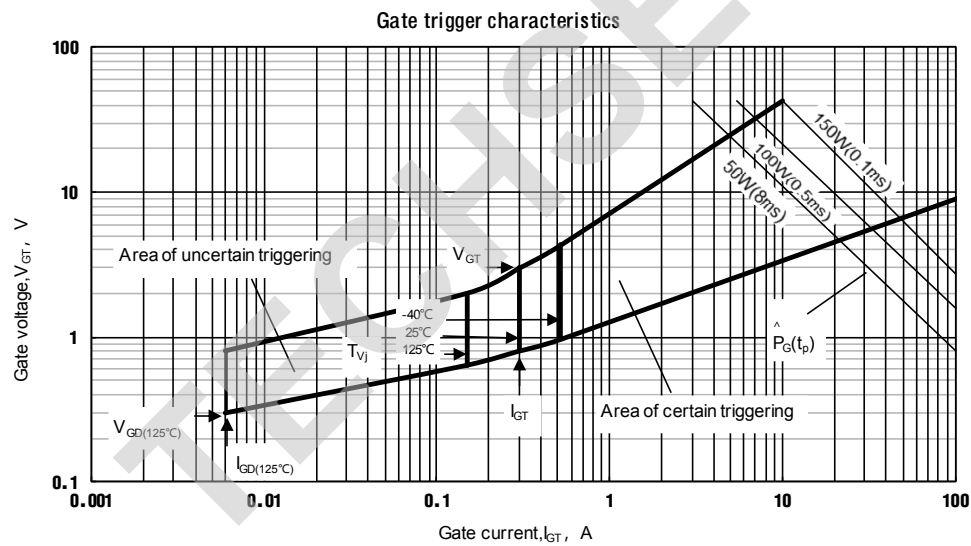


Fig.9

Outline:

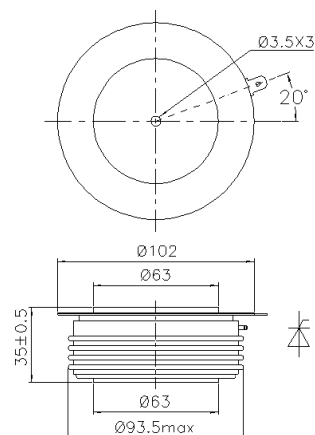

TECHSEM reserves the right to change specifications without notice.