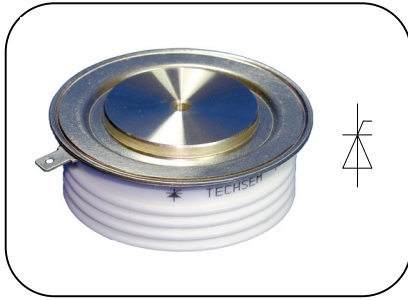


**Features**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

Part No. Y38KPE-KT33a(c)T

$I_{T(AV)}$	890A	
V_{DRM}, V_{RRM}	1200V 1400V	
	1600V 1800V	

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_J (C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180 half sine wave 50Hz Double side cooled $T_C=70\text{ C}$				890	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	1100		1800	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			40	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			11	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$				605	$A^2s \cdot 10^3$
V_{TO}	Threshold voltage		125			0.85	V
r_T	On-state slope resistance					0.42	m Ω
V_{TM}	Peak on-state voltage	$I_{TM}=1500A$, $F=15kN$	25			2.00	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/ μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 1300A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			100	A/ μs
Q_{rr}	Recovery charge	$I_{TM}=1000A$, $t_p=4000\mu s$, $di/dt=-20A/\mu s$, $V_R=100V$	125		1100		μC
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	35		300	mA
V_{GT}	Gate trigger voltage			0.8		2.5	V
I_H	Holding current			20		250	mA
I_L	Latching current					500	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=0.67V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 15kN				0.035	C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.008	
F_m	Mounting force			10		20	kN
T_{vj}	Junction temperature			-40		125	C
T_{stg}	Stored temperature			-40		140	C
W_i	Weight				150/ 240		g
Outline	KT33aT/KT33cT						

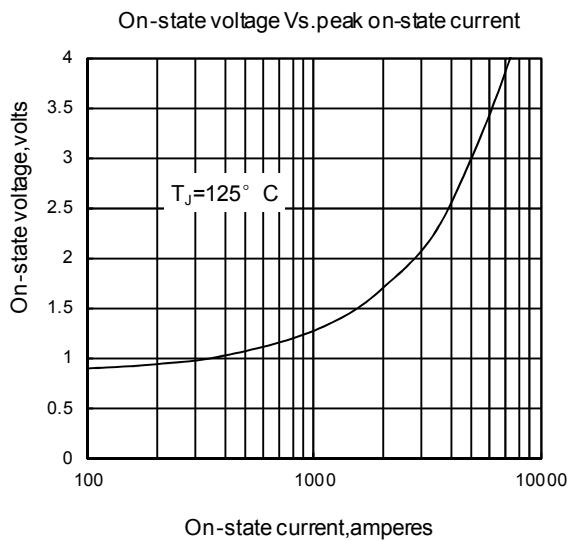


Fig1

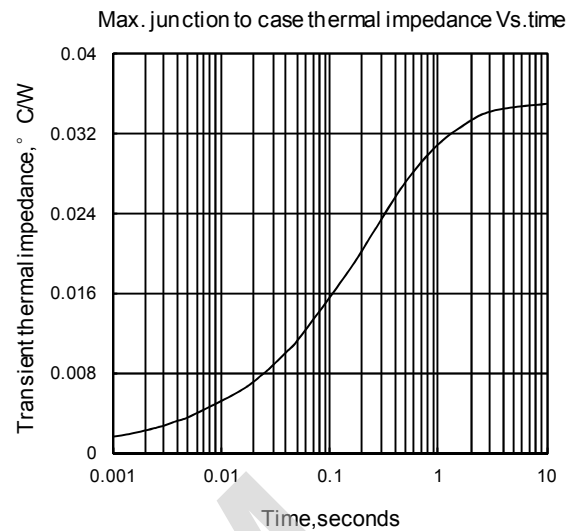


Fig2

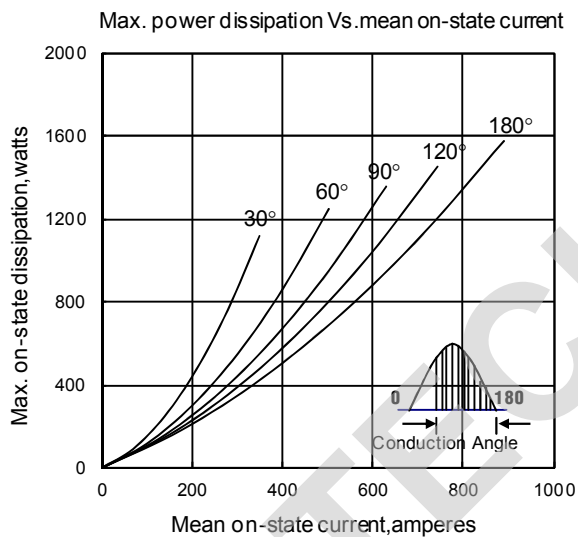


Fig3

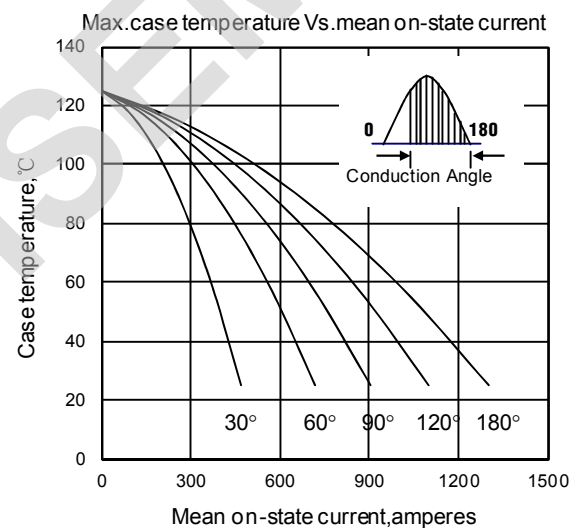


Fig4

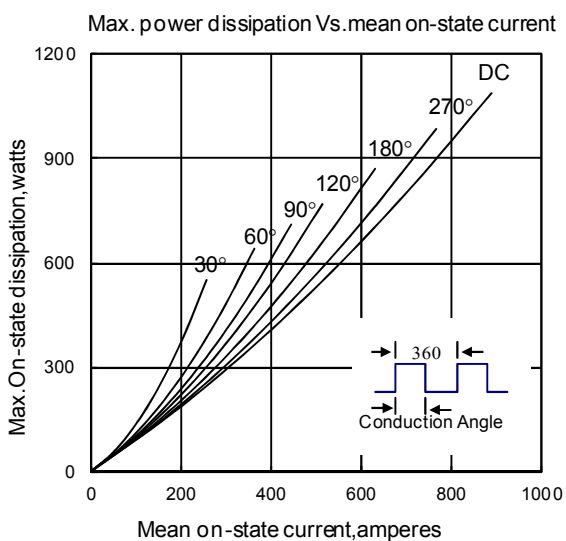


Fig5

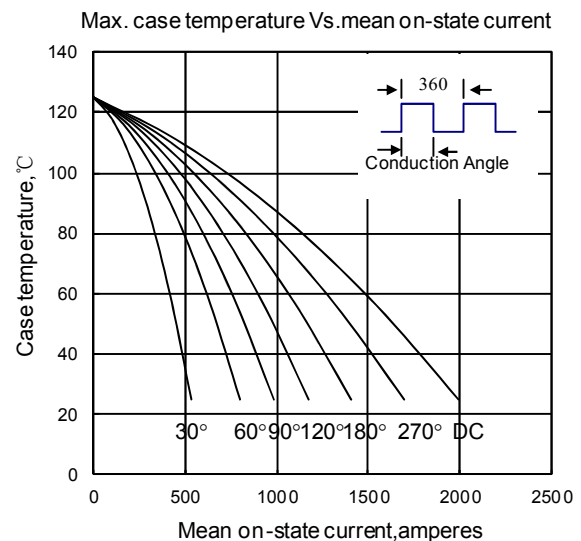


Fig6

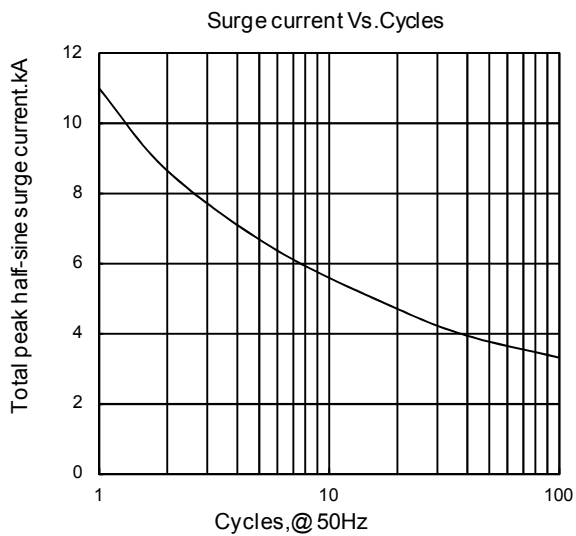


Fig7

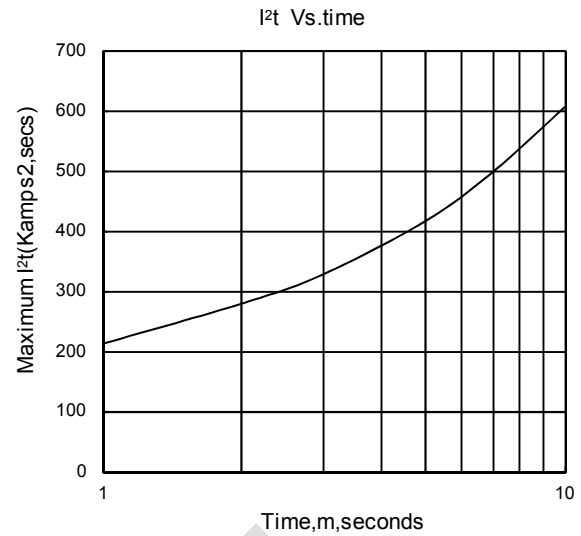


Fig8


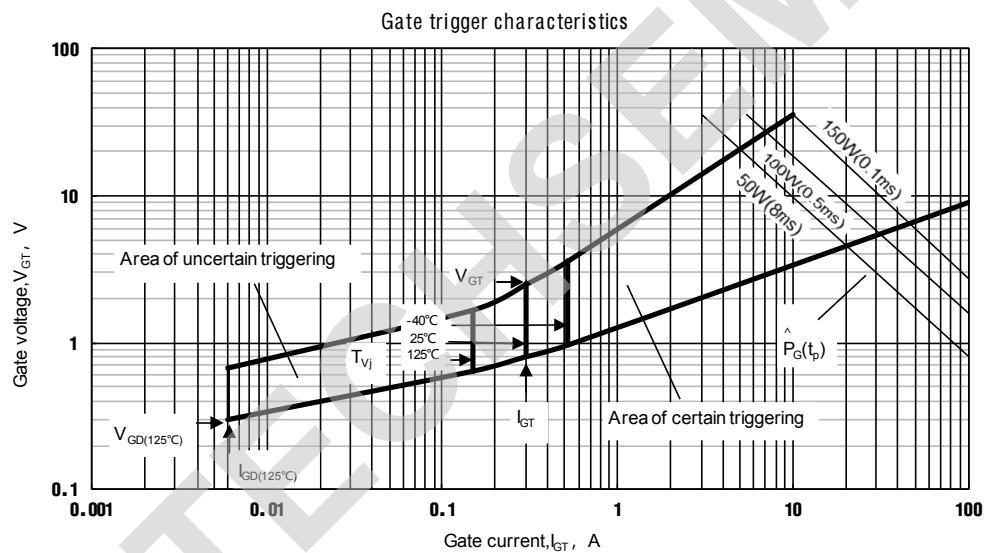


Fig.9

Outline:

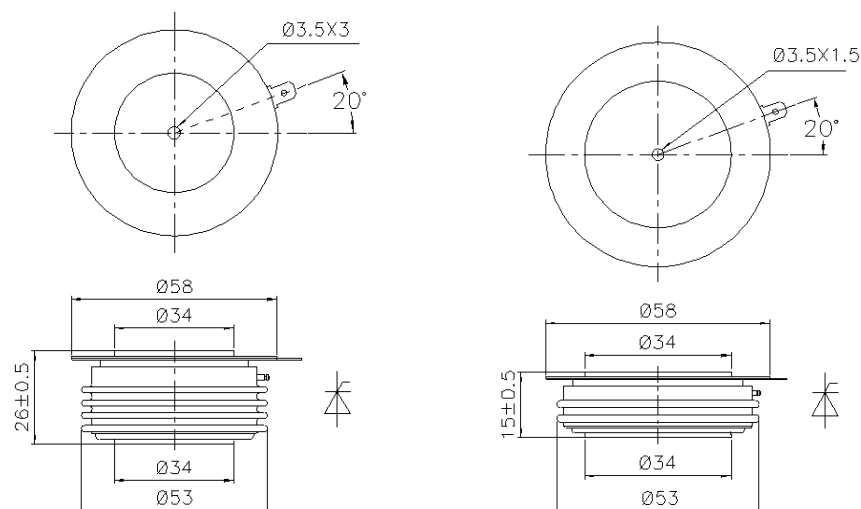

TECHSEM reserves the right to change specifications without notice.