



Features :

- Isolated mounting base 3000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{RSM}	V_{RRM}	Type & Outline
900V	800V	MDx182-08-216F3
1100V	1000V	MDx182-10-216F3
1300V	1200V	MDx182-12-216F3
1500V	1400V	MDx182-14-216F3
1700V	1600V	MDx182-16-216F3
1900V	1800V	MDx182-18-216F3

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_j (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^\circ\text{C}$	150			182	A
$I_{F(RMS)}$	RMS forward current		150			286	A
I_{RRM}	Repetitive peak current	at V_{RRM}	150			12	mA
I_{FSM}	Surge forward current	10ms half sine wave	150			6.4	KA
I^2t	I^2T for fusing coordination	$V_R=0.6V_{RRM}$				205	$\text{A}^2\text{s} \times 10^3$
V_{FO}	Threshold voltage		150			0.80	V
r_F	Forward slop resistance					0.96	$\text{m}\Omega$
V_{FM}	Peak forward voltage	$I_{FM}=550\text{A}$	25			1.43	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine Single side cooled per chip				0.220	$^\circ\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine Single side cooled per chip				0.08	$^\circ\text{C}/\text{W}$
V_{iso}	Isolation voltage	50Hz, R.M.S, t=1min, $I_{iso}:1\text{mA(max)}$		3000			V
F_m	Terminal connection torque(M6)				6.0		$\text{N}\cdot\text{m}$
	Mounting torque(M6)				6.0		$\text{N}\cdot\text{m}$
T_{stg}	Stored temperature			-40		125	$^\circ\text{C}$
W_t	Weight				285		g
Outline				216F3			

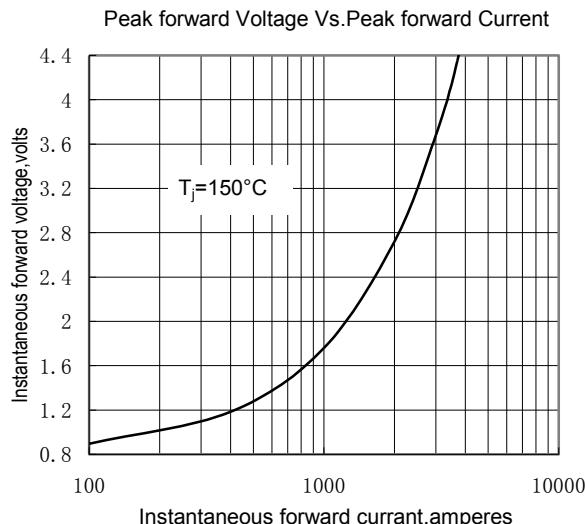


Fig.1

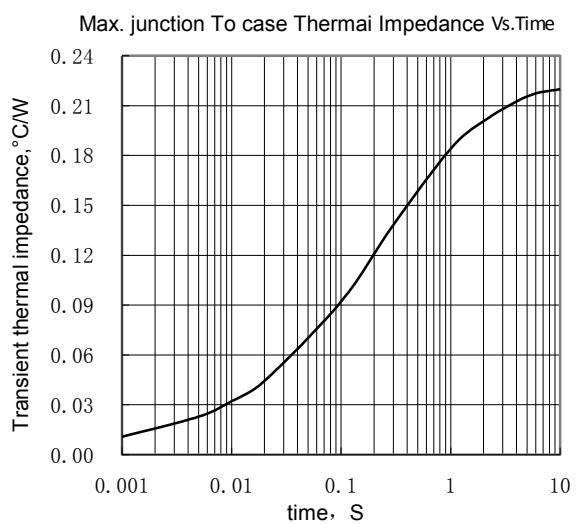


Fig.2

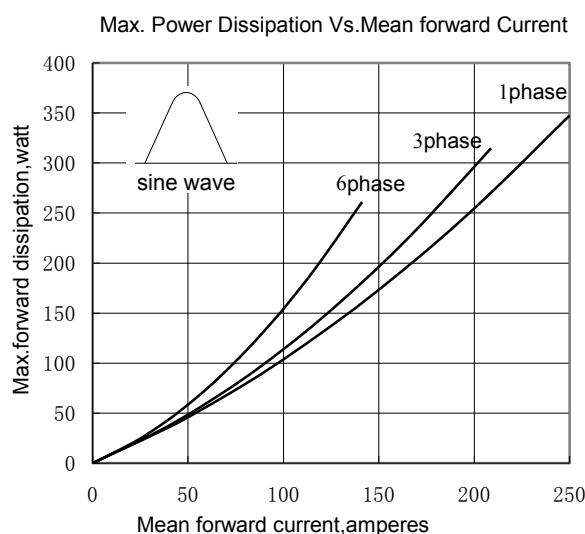


Fig.3

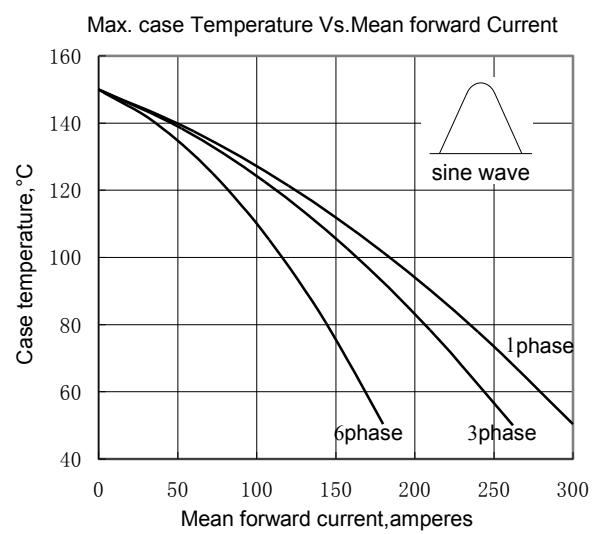


Fig.4

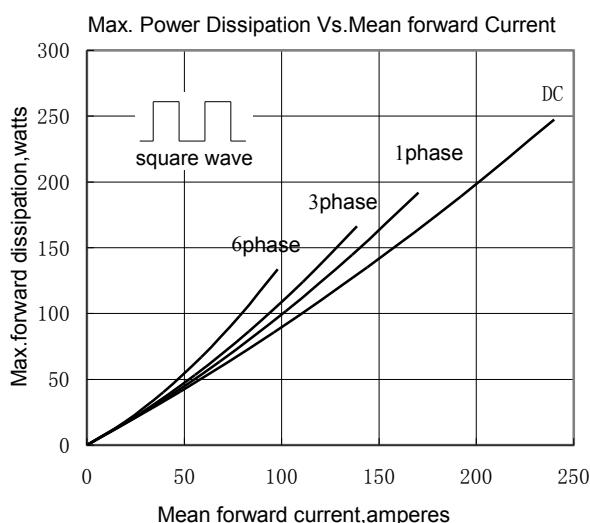


Fig.5

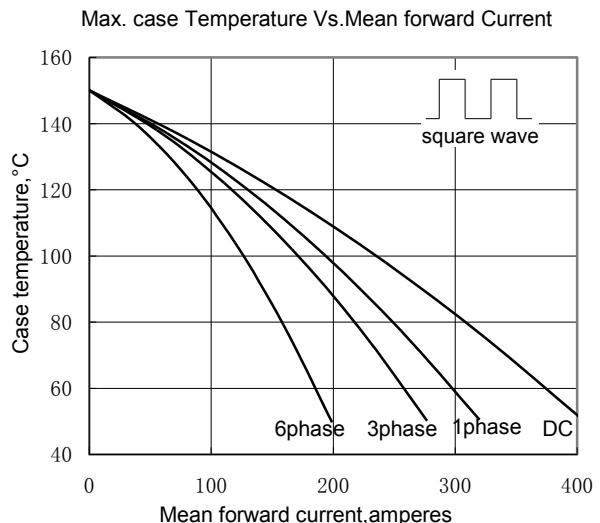


Fig.6

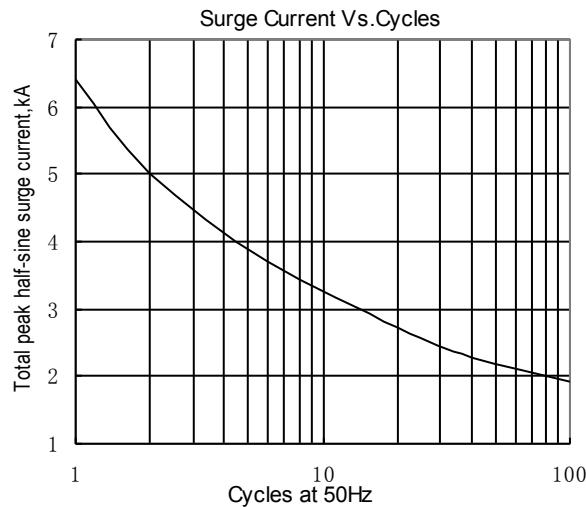


Fig.7


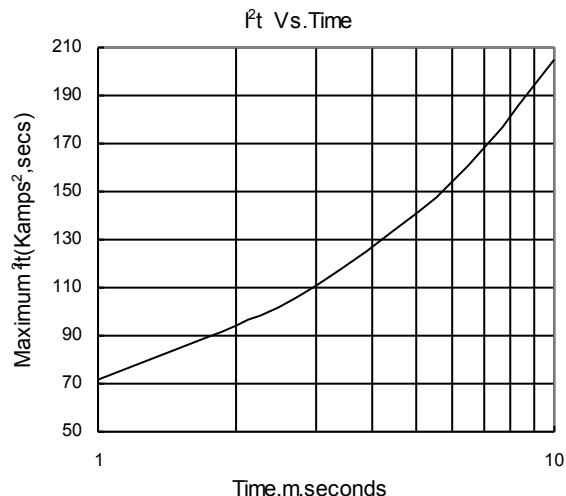


Fig.8

Outline:



216F3

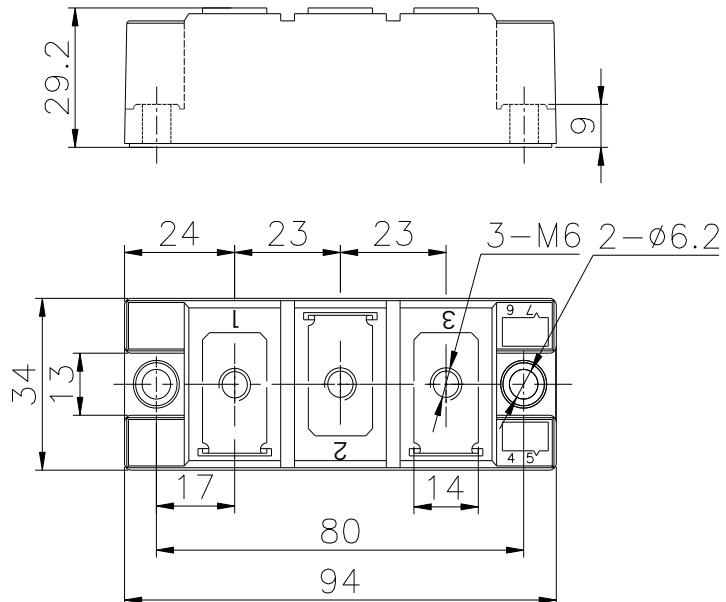