

Features :

- Isolated mounting base 3000V~
- Pressure contact technology with increased power cycling capability
- Space and weight saving

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{RSM}	V_{RRM}	Type & Outline
900V	800V	MDx570-08-416F3
1100V	1000V	MDx570-10-416F3
1300V	1200V	MDx570-12-416F3
1500V	1400V	MDx570-14-416F3
1700V	1600V	MDx570-16-416F3
1900V	1800V	MDx570-18-416F3

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^{\circ}C$	150			500	A
$I_{F(RMS)}$	RMS forward current		150			785	A
I_{RRM}	Repetitive peak current	at V_{RRM}	150			40	mA
I_{FSM}	Surge forward current	10ms half sine wave	150			18	KA
I^2t	I^2T for fusing coordination	$V_R=0.6V_{RRM}$				1620	A^2s*10^3
V_{FO}	Threshold voltage		150			0.75	V
r_F	Forward slop resistance					0.30	mΩ
V_{FM}	Peak forward voltage	$I_{FM}=1800A$	25			1.45	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180°sine Single side cooled per chip				0.090	$^{\circ}C/W$
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180°sine Single side cooled per chip				0.024	$^{\circ}C/W$
V_{iso}	Isolation voltage	50Hz, R.M.S, t=1min, $I_{iso}:1mA(max)$		3000			V
F_m	Terminal connection torque(M10)				12.0		N·m
	Mounting torque(M6)				6.0		N·m
T_{stg}	Stored temperature			-40		125	$^{\circ}C$
W_t	Weight				1430		g
Outline	416F3						

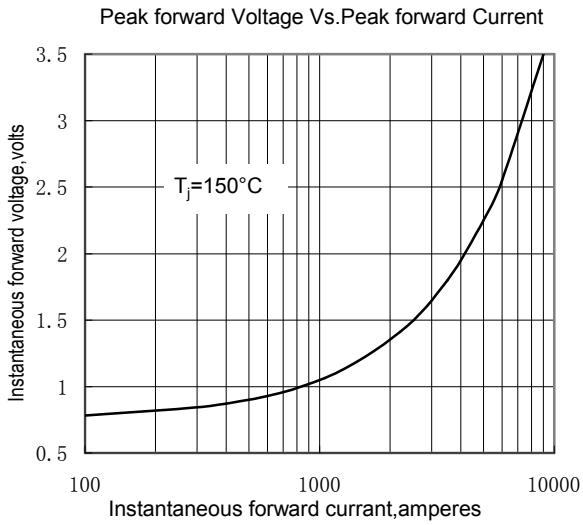


Fig.1

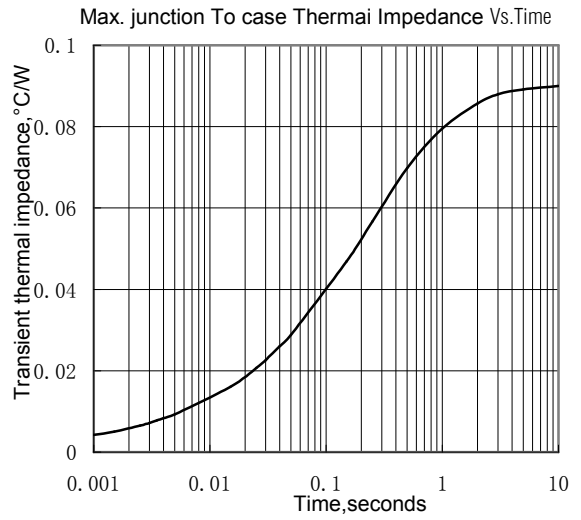


Fig.2

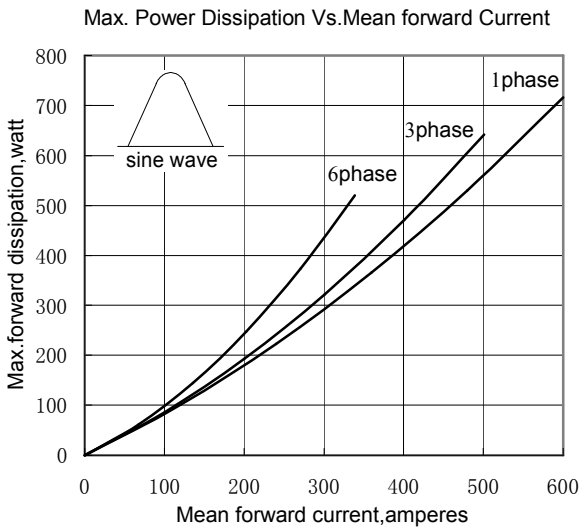


Fig.3

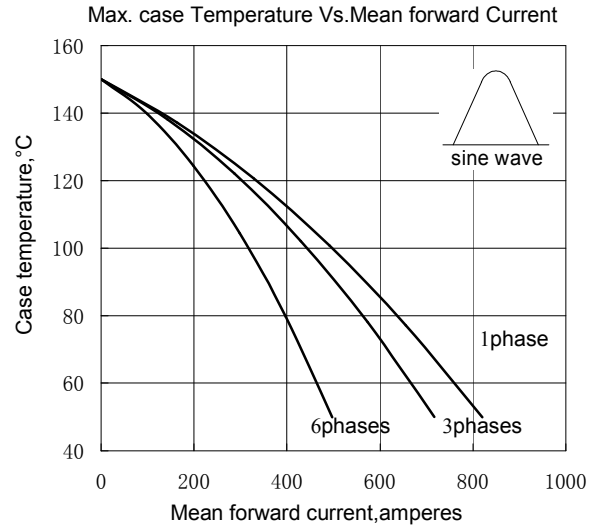


Fig.4

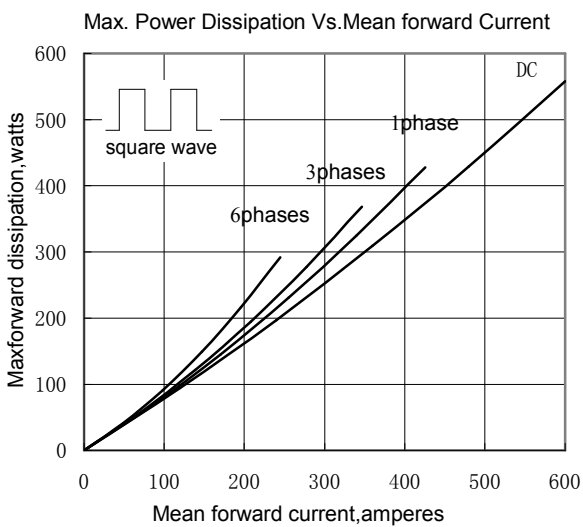


Fig.5

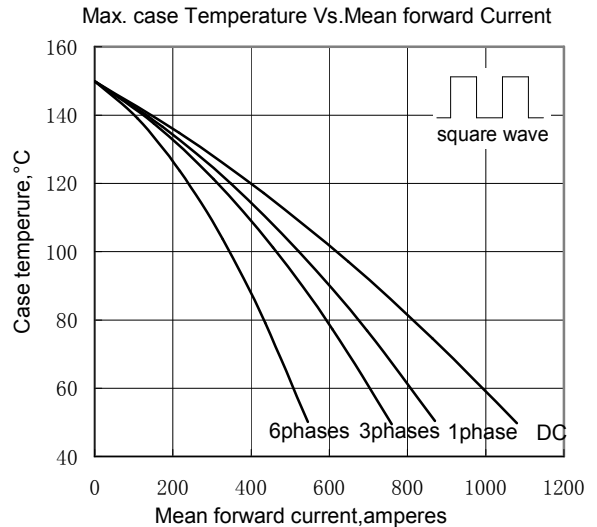


Fig.6

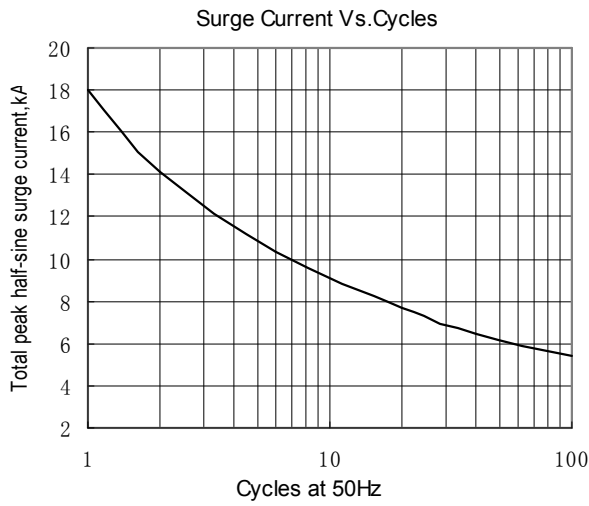


Fig.7

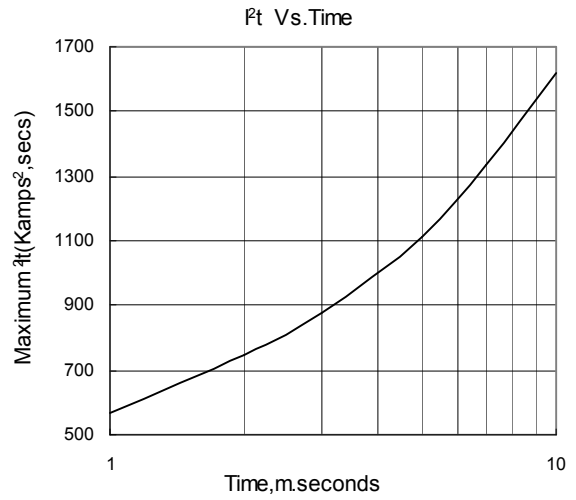


Fig.8

Outline:

