



Features:

- Isolated mounting base 3000V~
- Pressure contact technology with increased power cycling capability
- Space and weight savings

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{DSM}, V_{RSM}	V_{DRM}, V_{RRM}	Type & Outline
900V	800V	MTx285-08-413F3D
1100V	1000V	MTx285-10-413F3D
1300V	1200V	MTx285-12-413F3D
1500V	1400V	MTx285-14-413F3D
1700V	1600V	MTx285-16-413F3D
1900V	1800 V	MTx285-18-413F3D

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side cooled, $T_c=75^{\circ}\text{C}$	125			300	A
$I_{T(RMS)}$	RMS on-state current		125			471	A
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			25	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			9.1	KA
I^2t	I^2T for fusing coordination	$V_R=60\%V_{RRM}$				414	$\text{A}^2\text{s} \times 10^3$
V_{TO}	Threshold voltage		125			0.80	V
r_T	On-state slop resistance					0.53	$\text{m}\Omega$
V_{TM}	Peak on-state voltage	$I_{TM}=750\text{A}$	25			1.45	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			1000	$\text{V}/\mu\text{s}$
di/dt	Critical rate of rise of on-state current	Gate source 1.5A $t \leq 0.5\mu\text{s}$ Repetitive	125			200	$\text{A}/\mu\text{s}$
I_{GT}	Gate trigger current		25	30		180	mA
V_{GT}	Gate trigger voltage	$V_A=12\text{V}$, $I_A=1\text{A}$		1.0		2.5	V
I_H	Holding current			20		180	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.2			V
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled				0.120	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	Single side cooled				0.04	$^{\circ}\text{C}/\text{W}$
V_{iso}	Isolation voltage	50Hz,R.M.S., $t=1\text{min}$, $I_{iso}:1\text{mA}(\text{MAX})$		3000			V
F_m	Thermal connection torque(M8)				12		$\text{N}\cdot\text{m}$
	Mounting torque(M6)				6.0		$\text{N}\cdot\text{m}$
T_{stg}	Stored temperature			-40		125	$^{\circ}\text{C}$
W_t	Weight				820		g
Outline				413F3D			

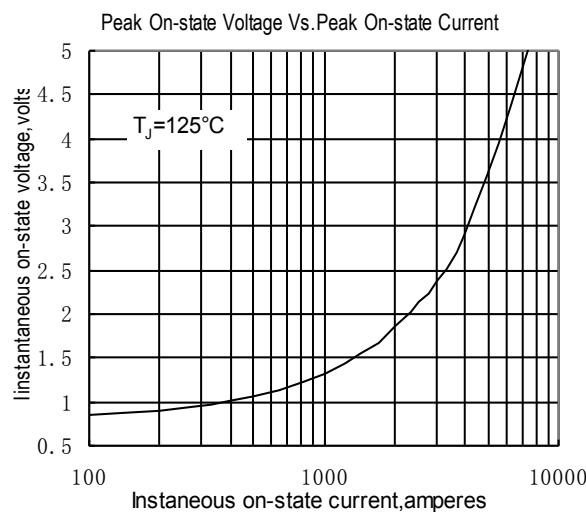


Fig.1

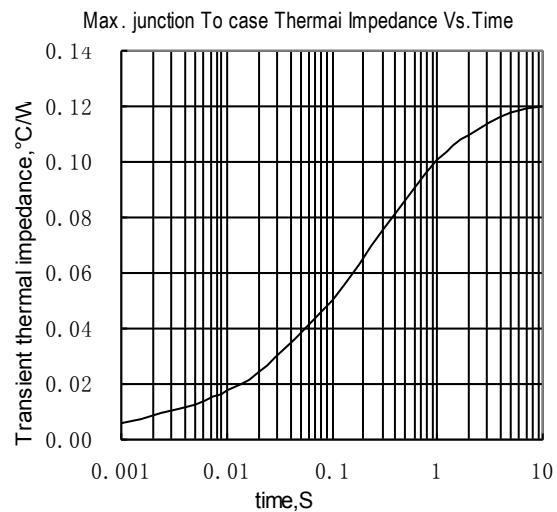


Fig.2

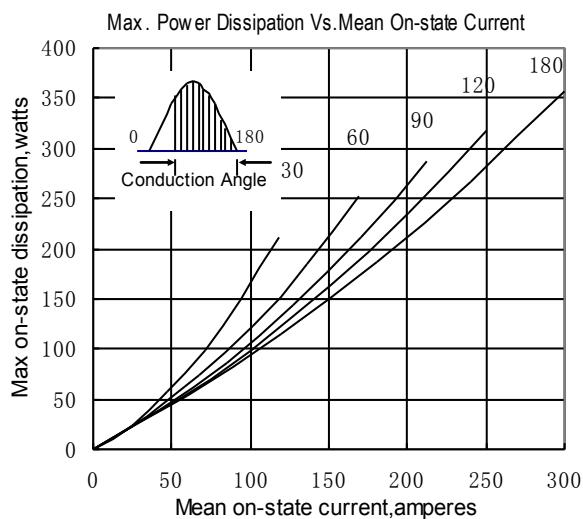


Fig.3

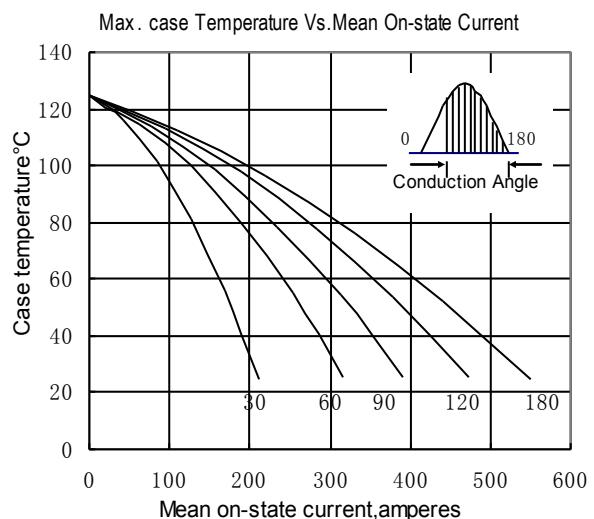


Fig.4

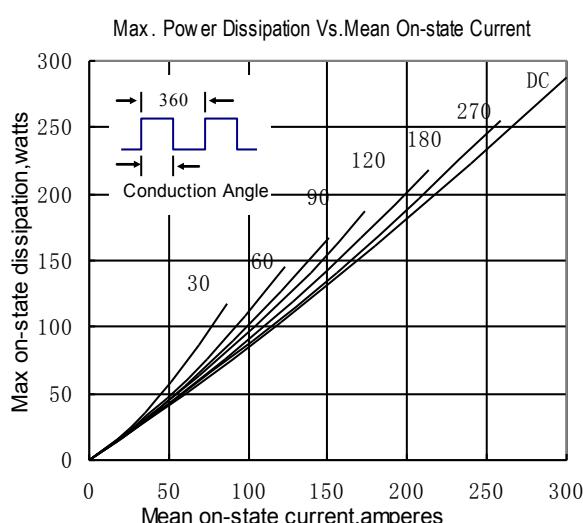


Fig.5

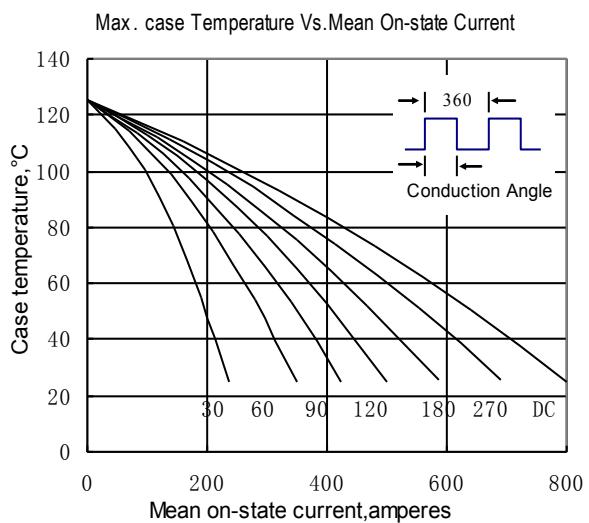


Fig.6

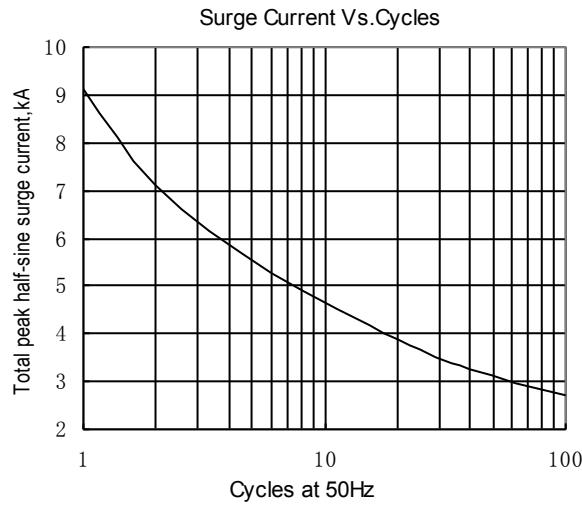


Fig.7

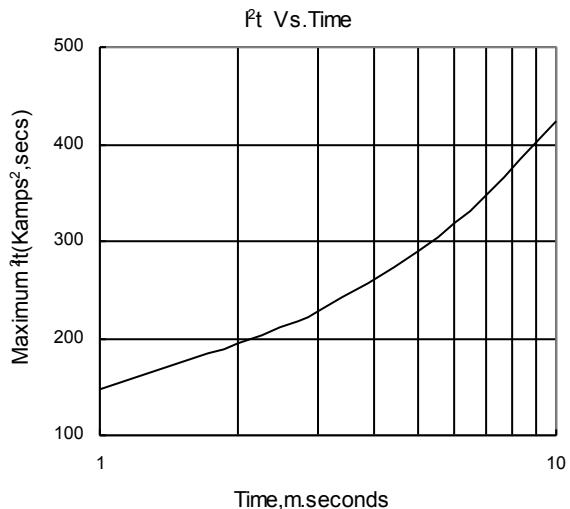


Fig.8

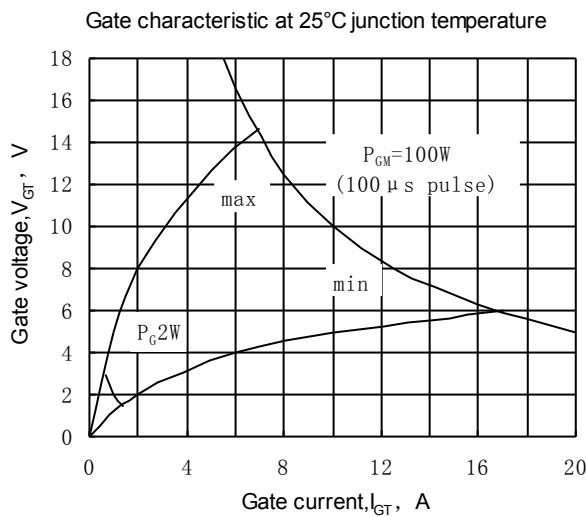


Fig.9


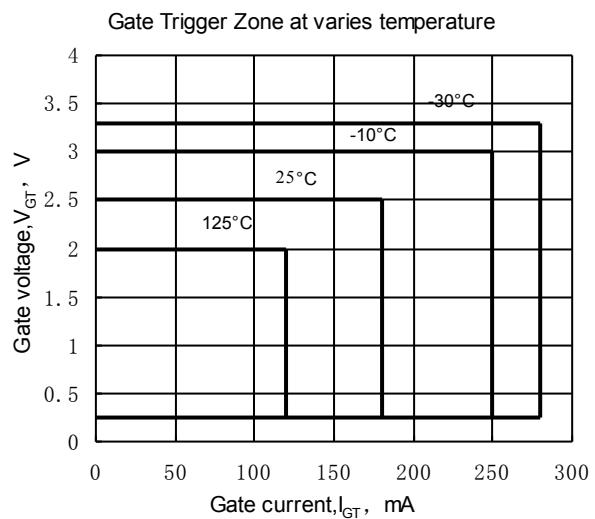


Fig.10

Outline:



413F3D

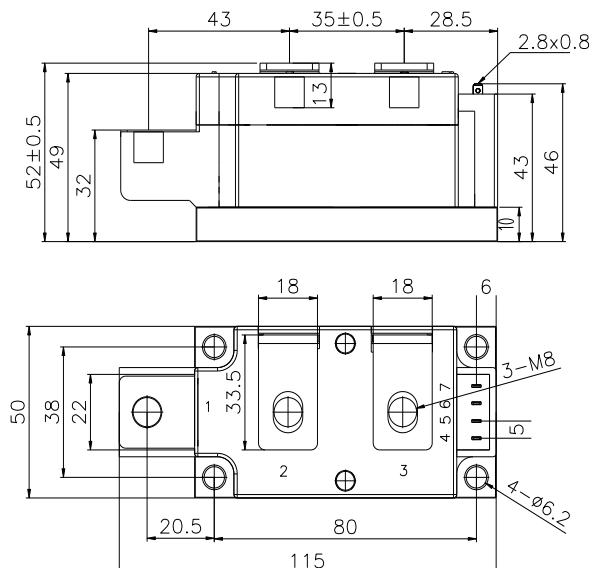