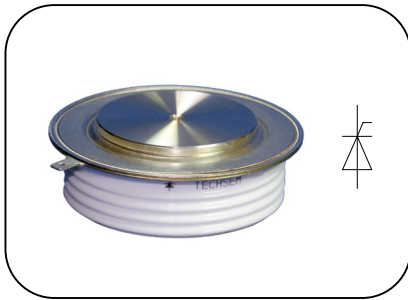


**Features:**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications:

- AC controllers
- DC and AC motor control
- Controlled rectifiers

Part No. H38KPJ-KT33cT

$I_{T(AV)}$	520A		
V_{DRM}, V_{RRM}	3600V	3800V	
	4000V	4200V	
	4500V		

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_J (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180 half sine wave 50Hz Double side cooled	$T_C=70^\circ\text{C}$	125		520	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10\text{ms}$	125	3600		4500	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			100	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			6	kA
I^2t	I^2t for fusing coordination					180	$10^3\text{A}^2\text{s}$
V_{TO}	Threshold voltage		125			1.10	V
r_T	On-state slope resistance					1.30	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=1000\text{A}$, $F=15\text{kN}$	25			2.40	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$, Gate pulse $t_r \leq 0.5\mu\text{s}$ $I_{GM}=1.5\text{A}$	125			100	A/μs
Q_{rr}	Recovery charge	$I_{TM}=1000\text{A}$, $t_p=4000\mu\text{s}$, $di/dt=-5\text{A}/\mu\text{s}$, $V_R=100\text{V}$	125		1800		μC
I_{GT}	Gate trigger current	$V_A=12\text{V}$, $I_A=1\text{A}$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			25		200	mA
I_L	Latching current					1500	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.3	V
$R_{th(j-c)}$	Thermal resistance Junction to case	Double side cooled Clamping force 24kN				0.035	C/W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.008	
F_m	Mounting force			10		20	kN
T_{vj}	Junction temperature			-40		125	°C
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				240		g
Outline	KT33cT						

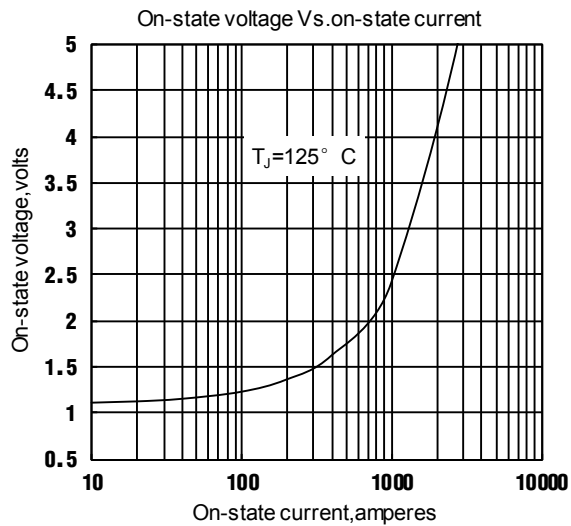


Fig.1

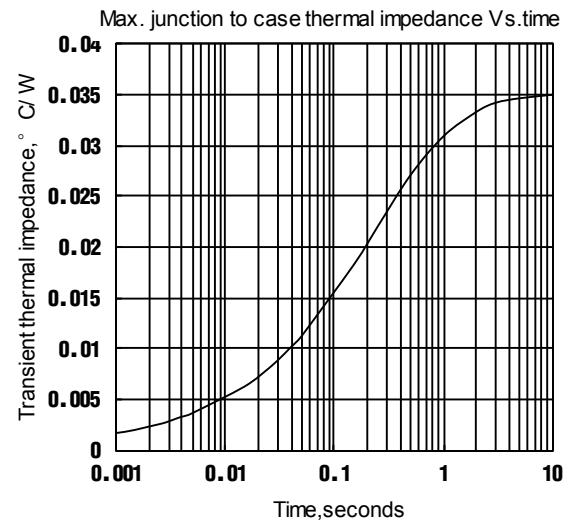


Fig.2

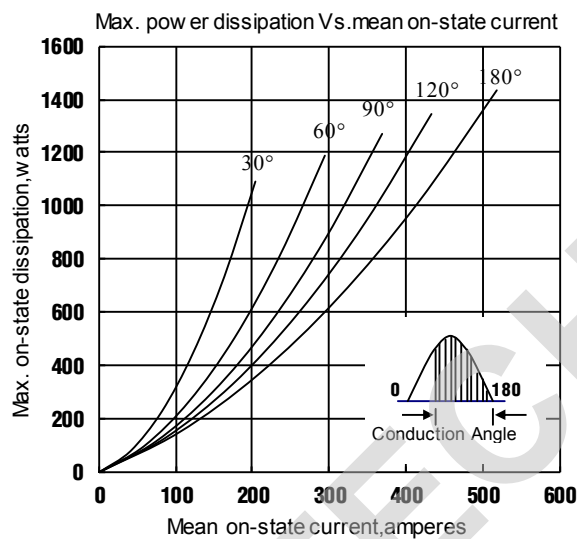


Fig.3

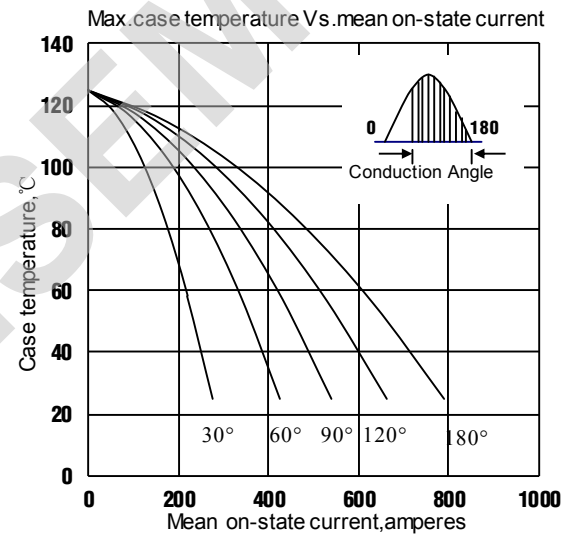


Fig.4

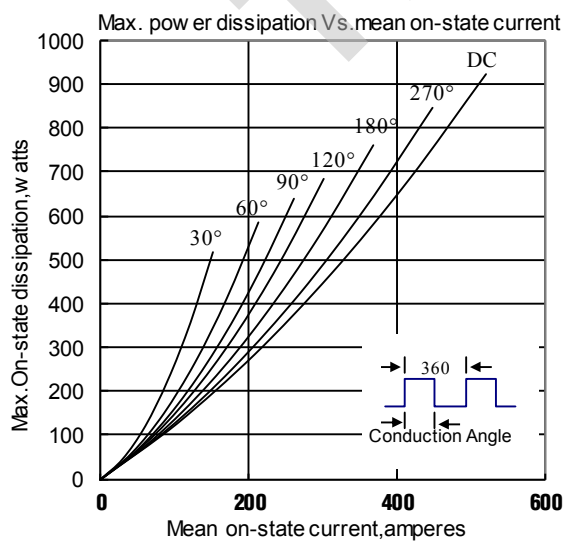


Fig.5

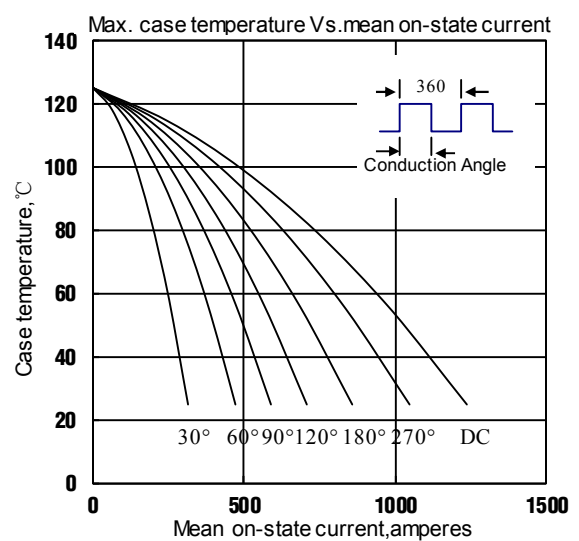


Fig.6

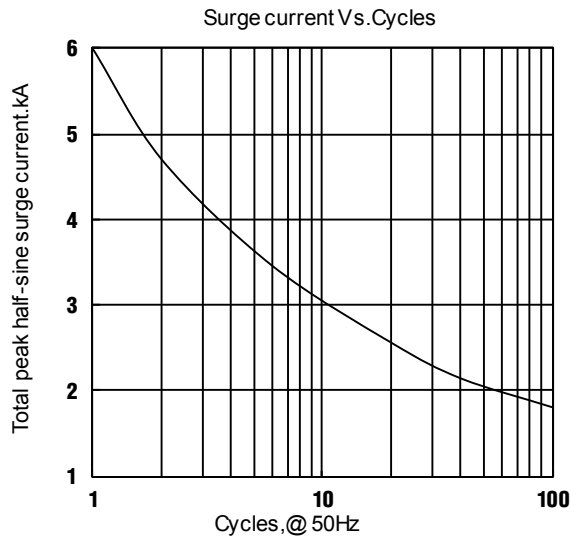


Fig.7

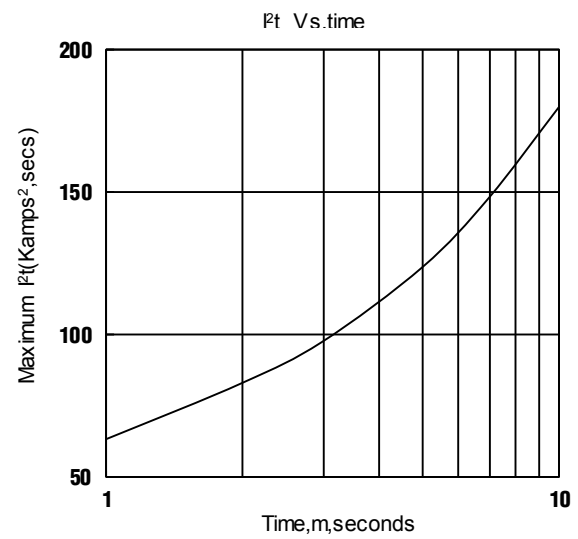


Fig.8


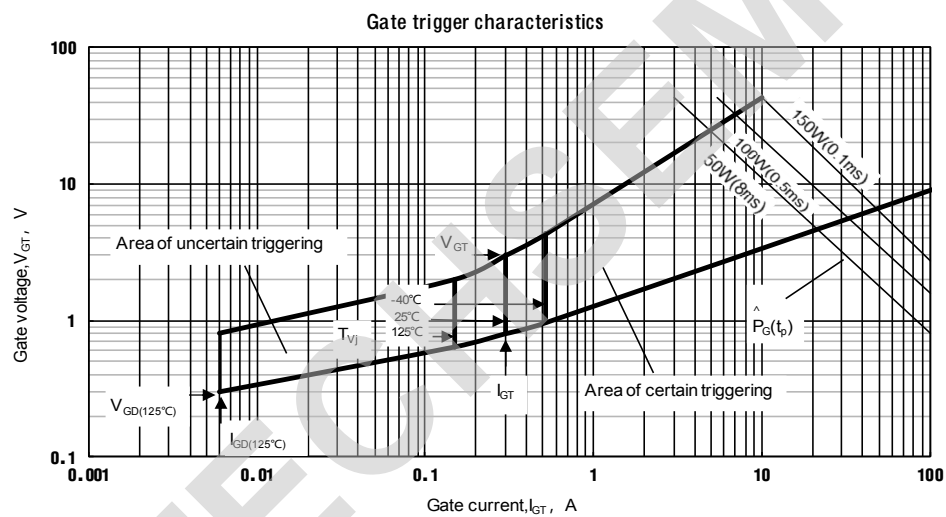


Fig.9

Outline:

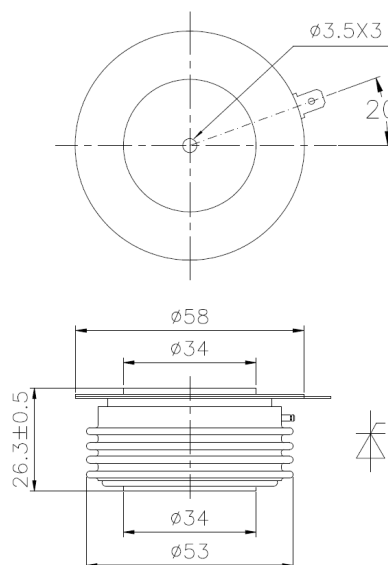

TECHSEM reserves the right to change specifications without notice.